



# HYPOTHETICAL ANALYSIS ON THE TRANSITORY CHARACTERISTICS OF EDFA IN OPTICAL FIBERCOMMUNICATION

<sup>1</sup>Dr P Prabakaran, <sup>2</sup>Dr G S S Rao, <sup>3</sup>Dr Chandra Naik, <sup>4</sup>Dr M Giri  
<sup>1, 2, 3, 4</sup> Professor, Department of Computer Science and Engineering,  
Malla Reddy College of Engineering, Hyderabad.

## Abstract:

**Erbium laser amplifier has become one of the important components indispensable in optical fiber communication for its high gain, high pumping efficiency, polarization-independent and small crosstalk between signals, etc. The transient characteristic of the EDFA is an inevitable phenomenon based on the mechanism of EDFA amplification by stimulated emission of radiation. This paper focuses on the EDFA transient effects caused by the signal power, pump power, and gain saturation recovery time from the aspects of EDFA transient rate equation, the relation between the signal power and the output power, The relations between pump power and the output power and the transient effect caused by gain recovery time.**

**Keywords: EDFA, transient characteristics, optical fiber communication**

## Introduction

In the future, optical fiber communication will occupy the leading position in the communication's industry inevitably as its large capacity, long distance, security and good performance of adaptability. While as a representative, Erbium laser amplifier has become one of the important components indispensable in optical fiber communication for its high gain, high pumping efficiency, polarization-independent and small crosstalk between signals, etc. However when a bunch of light pulses pass through an optical amplifier, the former pulse will have some impact on the amplification behavior of the latter one, even

when it is a single light pulse, the leading edge will also affect the amplification behavior of the Trailing edge, which is an inevitable phenomenon based on the mechanism of EDFA amplification by stimulated emission of radiation, known as the transient characteristics of the EDFA.


The main reason causing the transient gain effect is the initial state of stimulated emission and the temporal correlation, the leading edge of signal pulse makes a large number of particles on the upper level transit by absorbing energy, and then supply the lost particles for stimulated radioactive transition on the upper level by the two means of transverse relaxation of the particles on the upper level and nonradiative transitions of a large number of particles in the pump energy level, in a sufficiently short period of time, if the number of particles in the upper level can't be replenished, there will be a gain difference between the former and the latter one of a series of pulses, or even the former and the latter edge of a pulse, causing changes in the output pulse waveform [1].

The main parameters of transient effects of EDFA are almost the same as the one of steady state, both are associated with the pump power, signal power and noise-related gain of EDFA, the only difference is that the number of particles in the upper and lower levels is not certain value at transient changes, which changes with time, when the signal light passes through the EDFA, the transient power changes will cause the gain saturation phenomenon of EDFA, which is described by the EDFA gain recovery time. So when we analyze the transient changes of EDFA,

we also need to analyze the recovery time of EDFA gain [2]. This paper focuses on the EDFA transient effects caused by the signal power, pump power, and gain saturation recovery time.

EDFA transient rate equation and the transient rate equation [3] should be adopted to analyze the characteristics of the amplifier. The level population change equation is as follows: (ignoring pump state absorption) The relation between the signal power and the output power

The power transmission equation of the signal

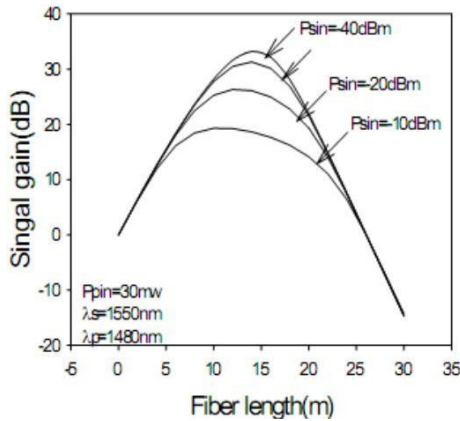

can be acquired by the rate equation and the power transmission equation of the level system. Assume that the number of particles on the upper level the k-beam can be achieved level is constant when the amplifier works at the fiber. The relationship between the gain steady state. However, the time-varying response with the input power and the length of the of the number of particles on the upper level must fiber is shown in figure1[4].

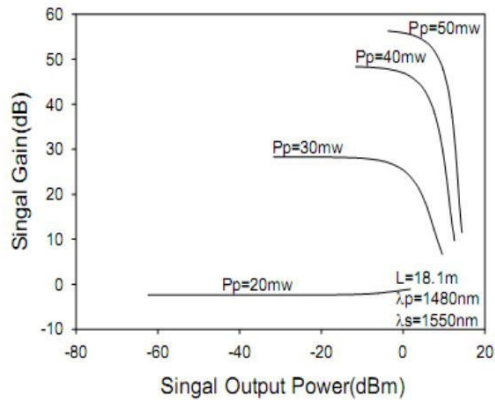


Fig 1 The relationship between the gain with Fig 2. The relationship between the pump

It can be seen from the figure that the gain is affected by the input power and the length of the fiber. For a given signal power, there is always an optimal fiber length which makes the maximum gain. While for a fixed fiber length, the gain increases as the input signal power[5].

The relations between pump power and the output power

$P_p(L)$  represent the input and output normalized pump power respectively.

According to (14) and the relationship between gain  $G$  and the normalized input pump power  $P_p(0)$  as well as the length  $L$  of the ampplifwieerr,aintdcathnebseigknaolwountpt huattppfoowreargiveninput signal power ,when changing the pump power, the gain changes as the pump power. However the optical amplification of EDFA is due to the principle of stimulated emission, so the impact on the inversion population from the pump power will also affects EDAF gain [6] . When the input signal power is small , the pump increases, the gain will also increase. Until the pump power reaches a certain level, the gain no longer increases, which is due to the complete

saturation of EDFA gain, the number of particles in he lower level are completely reversed at this time , there is little effect on the population inversion when increasing the pump power continuously, so the output power of the signal light hardly changes with pump light. However when the power of input signal light is larger, the front gain of the signal is larger, while the rear gain may decrease, which is also decided by the inversion population of EDFA, in which case the pump power is increased, the output power increases , which can slow down the gain reduction of the rear end . The relationship between the pump power and the signal output power is shown in Figure2.

It can be seen from the figure that the amplifier is in the state of small signal amplification when the pump power is small, in which case the signal output power is almost constant. As the pump power increases, the signal output power increases, the pump rate  $R_{13}$ , the stimulated emission rate  $W$

21 and the spontaneous emission rate taken as constants, it can be obtained by the transient rate equation: so the recovery time is always larger than the saturation time [9] . Therefore the

frontier edge of the signal light pulse consume the inversion population, which may be insufficient because there is not enough time to replenish when the trailing edge comes, leading to the reduction of the trailing edge gain, and a great distortion of the output waveform. Figure 4 shows the distortion waveform for a low frequency signal passing through the EDFA. but the speed for EDFA to enter into saturation also increases, until the pump power increases to a certain value, it can be seen that the output power of the signal is into saturation, which is a fixed value that does not change with the increase of the pump power.

The transient effect caused by gain recovery time

Analysis on the change of EDFA inversion population should be done before the analysis on gain recovery time. Assuming that the input pump is uniform, and the signal light is pulse signal,

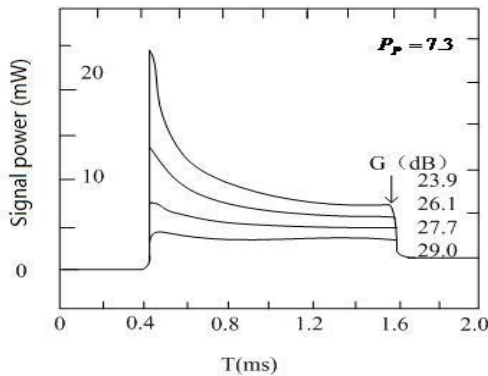


Fig 4 The distortion waveform for a low frequency signal

figure above shows that there will be an amplification distortion when a square wave signal pulse of lower frequency passes through the EDFA system. It can be seen that the waveform of the signal light pulse will be deformed in the process of transmission through the EDFA system and amplification. This is because that in the transmission process, the signal has been consuming the particles in the upper levels, leading to that the inversion population is a variable that changes with time, finally resulting in that the frontier gain of the square wave pulse is higher than the trailing edge gain [10]. The size of the signal modulation frequency has some impact on the

inversion population changes, and therefore it can be drawn that the modulation frequency of the signal light is related with the deformation of the pulse. In the case of the recovery time of EDFA gain, it can be analyzed by the change of EDFA output power in Figure 5.

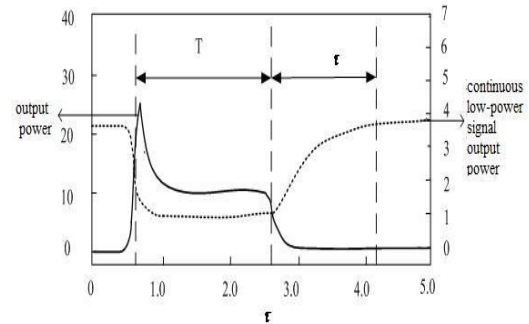


Fig 5 the output power changes of EDFA

The dotted line (continuous low-power signal light) indicates that when the input signal is not coupled with the optical pulse, EDFA is in the steady state, the continuous signal light output power is constant, when coupled with the input signal pulse of larger power, EDFA starts to be in the state of gain

saturation, continuous signal output power decreases along. When the input pulse is over, the complementary carriers increase, the gain starts to slowly return to the initial value, which is the small signal gain of no saturation, and the output power is gradually return to stability. The solid line indicates that at the beginning of the entrance of the signal light, the gain is not saturated, the signal output power is high, the gain factor is large, then with the consumption of the inversion population by the input pulse, although by pump supplement, but the inversion population is not enough to compensate for the lost particles used for amplification before, leading to that the number of particles on the upper level decreases, the gain saturation occurs, the output power decreases until the pulse width =  $T$ , the input pulse transmission of number is over, the output power is reduced to zero. Gain recovery time is the duration from the minimum gain value of the pulse end ( $T$  s) to the value when the gain has been restored to the steady state.

We conclude that if the time constant  $t_{rec}$  is much smaller than the signal modulation cycle (modulation  $T \gg t_{rec}$ ), that is the signal symbol rate is low, the signal is low-speed

long-pulse signal, the EDFA inversion population change is small, resulting in a weak graphic effects.

When the time constant  $t_{rec}$  is much larger than the signal modulation cycle (modulating  $T \ll t_{rec}$ ), that is the signal symbol rate is higher, for this narrow pulse signal, EDFA do not appear graphical effects basically.

When the time constant  $t_{rec}$  is several times of the period of the modulation signal ( $t_{rec} \sim T$ ), the frontier pulse waveform will be distorted and along comes the latter pulse, then the gain is not stabilized, the particles have not been pumped transitions, the gain of the latter pulse is 0, as time increases, the gain slowly return. A larger effect of graphics generated at this time. The figure of waveform distortion should be as follows [2] Figure6.

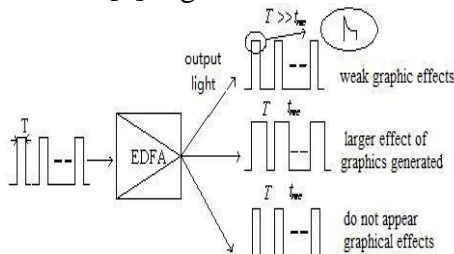


Fig 6 The figure of waveform distortion of EDFA signal for different pulse width

## Conclusion

Due to the analysis above, the article determined the relationship between the signal output power, pump power and signal power. Based on the theoretical study and simulation, the article draws the following conclusions: When the pump power is fixed, as the input signal power increases, the gain recovery time increases, the saturation time slightly decreases. When the input signal power is fixed, with the increase of pump power, the gain recovery time and saturation time decreases. Modulation signal pulse width has an effect on the EDFA transient effect, only when the pulse width  $T$  and the gain recovery time is a particular value, the distortion is obvious. When results hardly any graphic effect; when  $t_{rec} \ll T$ , it results a weak graphic effects.

## References:

[1] Song-Yingxiong, Li-Yingchun. All-Optical Gain-Clamped EDFA with High Gain and Low Noise Factor. JOURNAL OF SHANGHAI

UNIVERSITY(NATURAL SCIENCE).2006,12(2) : 120-124

[2] Jiang-Nan. Measure of Recovery Time and Research of Gain-flattening Technology of Erbium-doped Fiber Amplifier. Beijing Jiaotong University.2006.12

[3] Zhao-Lanlan,Zhu-Yiqing. Pump Power's Impact on the Gain Tilt of C-Band EDFA [J]. Journal of Jiangnan University(Natural Science Edition),2010,9(3):289-291

[4] Yu-Qiaoyan. Research on Application of EDFA in High Speed Fiber Communication. Wuyi Universtiy.2010

[5] Awaji.Y, Furukawa.H, Wada.N, Chan.P, Man.R et al. Burst-mode EDFA.

[6] Shi-Fengqi. Study of High Concentration Erbium-doped Fiber. Beijing Jiaotong University.2008

[7] Toru Shiozaki, Masaru Fuse, Susumu Morikura. A Study of Gain Dynamics of Erbium-Doped Fiber Amplifiers for Burst Optical Signals

. Networkings and switching.2003

[8]P.E.Barnsley,H.J.Wickes,G.E.Wickens et al. All-Optical Clock Recovery from 5 Gb/s RZ Data Using a Self-Pulsating 1.56um Laser Diode.IEEE.1991

[9] G.Talli, M.J.Adams. Gain recovery acceleration in semiconductor optical amplifiers employing a holding beam. Optics Communications.2005,245:363-370

[10]E.Desurvire,M.Zirngibl et al. Dynamic Gain Compensation in Saturated Erbium-Doped Fiber Amplifiers.IEEE.1991:453-455